


# Industrial Modbus Ethernet to Serial Gateways

## MESR900 Series - Fiber Models



MESR Modbus Gateways bridge devices on Modbus serial networks (RS-232, RS-422 or RS-485) with those on Modbus TCP networks, allowing seamless integration. Serial ports can be accessed over a LAN or WAN using Direct IP Mode connections. Supporting up to 16 masters and 32 slaves, these gateways feature autodetecting 10/100 copper and fiber optic options. Easy-to-use software is designed for Windows 2000, 2003 Server, XP, Vista, 2008 Server and Windows 7. Serial data rates up to 230 kbps ensure maximum network flexibility. MESR9xx gateways are built for use in industrial environments, featuring a slim IP30 DIN rail mountable case. They operate from a range of DC power supply voltages and have pluggable terminal block connectors. An external power supply, sold separately, is required. The MESR92x units have an additional Ethernet port which functions much like an Ethernet Switch, allowing pass-through connectivity for other Ethernet devices. This port can also be used to “daisy chain” multiple gateways. MESR90x units have one Ethernet port. B&B Electronics’ Vlinx™ is your number one choice for Ethernet to Serial conversion.

### MECHANICAL DIAGRAM - MESR92X MODELS

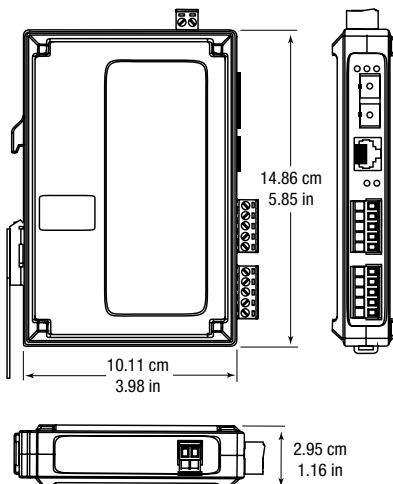

### PRODUCT FEATURES

- Ethernet enable Modbus RS-232/422/485
- Modbus TCP, ASCII & RTU
- Modbus flexibility – serial & Ethernet, Masters & slaves
- Modbus messaging priority control
- View messaging status in real time
- Complete Ethernet fiber options
- Easy configuration software

### ORDERING INFORMATION

MODEL NUMBER	SERIAL PORTS	SERIAL CONNECTOR	ETHERNET PORTS	ETHERNET CONNECTOR
MESR901-MC	1	DB9 or Terminal Block	Multi-mode Fiber	(1) SC
MESR901-MT	1	DB9 or Terminal Block	Multi-mode Fiber	(1) ST
MESR901-SC*	1	DB9 or Terminal Block	Single-mode Fiber	(1) SC
MESR901-ST*	1	DB9 or Terminal Block	Single-mode Fiber	(1) ST
MESR902T-MC	2	Terminal Block	Multi-mode Fiber	SC
MESR902T-MT	2	Terminal Block	Multi-mode Fiber	ST
MESR902T-SC*	2	Terminal Block	Single-mode Fiber	SC
MESR902T-ST*	2	Terminal Block	Single-mode Fiber	ST
MESR921-MC	1	DB9 or Terminal Block	Multi-mode Fiber, Copper	(1) SC, (1) RJ45
MESR921-MT	1	DB9 or Terminal Block	Multi-mode Fiber, Copper	(1) ST, (1) RJ45
MESR921-SC*	1	DB9 or Terminal Block	Single-mode Fiber, Copper	(1) SC, (1) RJ45
MESR921-ST*	1	DB9 or Terminal Block	Single-mode Fiber, Copper	(1) ST, (1) RJ45
MESR922T-MC	2	Terminal Block	Multi-mode Fiber, Copper	(1) SC, (1) RJ45
MESR922T-MT	2	Terminal Block	Multi-mode Fiber, Copper	(1) ST, (1) RJ45
MESR922T-SC*	2	Terminal Block	Single-mode Fiber, Copper	(1) SC, (1) RJ45
MESR922T-ST*	2	Terminal Block	Single-mode Fiber, Copper	(1) ST, (1) RJ45

+ All serial ports are software configurable for RS-232, RS-422, or RS-485.

\* 40km and 80km options available.

For Copper options please see page 166.

### ACCESSORIES

MDR-20-24 - DIN rail mount power supply 24VDC, 1.0 A output power

MDR-40-24 - DIN rail mount power supply 24VDC, 1.7 A output power

DRPM25 - 35mm DIN Rail to Panel Mount Bracket, 25mm wide

ERS35 - DIN Rail 1 Meter 35mm Steel

# Industrial Modbus Ethernet to Serial Gateways

MESR900 Series - Fiber Models



## SPECIFICATIONS

### SERIAL TECHNOLOGY

RS-232	TD, RD, RTS, CTS, DTR, DSR, DTD, GND
RS-485 2-Wire	Data A(-), Data B(+), GND
RS-422/485 4-Wire	TDA(-), TDB(+), RDA(-), RDB(+), GND
Serial Connector	DB9M or Removable Terminal Blocks, 12 to 28 AWG
Data Rate	Up to 230.4 Kbps

### FIBER OPTIC TECHNOLOGY

	MESR9xx-Mx	MESR9xx-Sx
Type / Wavelength	Multi-mode / 1310 nm	Single-mode / 1310 nm
Output Power	(-) 19 to (-) 14 dBm	(-) 15 to (-) 8 dBm
Receive Sensitivity	~ (-) 32 dBm	~ (-) 32 dBm
Cable	62.5 / 125 µm	9 / 125 µm
Connector	SC or ST	SC or ST
Range	2 km (1.2 miles)	15 km (9.3 miles)

	MESR9xx-Sx40	MESR9xx-Sx80
Type / Wavelength	Single-mode / 1310 nm	Single-mode / 1510 nm
Output Power	(-) 5 to 0 dBm	(-) 5 to 0 dBm
Receive Sensitivity	~ (-) 34 dBm	~ (-) 34 dBm
Cable	9 / 125 µm	9 / 125 µm
Connector	SC or ST	SC or ST
Range	40 km (5 miles)	80 km (49.7 miles)

### POWER

Source	External
Input Voltage	10 to 48 VDC (58 VDC Maximum)
Connector	Removable Terminal Block (12 – 28 AWG)

### POWER CONSUMPTION

MESR90x	4.0 Watts
MESR92x	6.0 Watts

### MECHANICAL

LED Indicators	Serial Port, Ethernet Link, Ready
Switches	Reset Button
Dimensions	MESR90x: 11.94 x 8.03 x 2.96 cm (4.70 x 3.16 x 1.16 in) MESR92x: 14.86 x 10.11 x 2.96 cm (5.85 x 3.98 x 1.16 in)
Enclosure	35mm DIN mount, Plastic, IP 30
Weight	MESR90x: 0.33 lbs (149.7 g) MESR92x: 0.45 lbs (201.4 g)
eDrawing	Available on website

### ENVIRONMENTAL

Operating Temperature	-40 to 80°C (-40 to 176°F)
Operating Humidity	0 to 95% Non-condensing
MTBF MESR90X	~ 132309 hours
MTBF MESR92X	~ 102593 hours
MTBF Calc Method	Parts Count Reliability Prediction

### NETWORK

Serial Memory	8 KB per port
Network Memory	4 KB
IP Port Addresses	5300 – Heartbeat and configuration Setting in TCP Mode (paired mode) 8899 – MESR 9xx Update
LAN	10/100 Mbps Auto-detecting
Ethernet	IEEE 802.3 auto detecting & auto MDI/MDX 10/100

### PROTOCOLS

TCP, IPv4, ARP, HTTP 1.0, ICMP/PING, DHCP/BOOTP	
IP Mode	Static, DHCP
TCP	User definable

### OTHER

Mode	Modbus RTU Master / Slave Modbus ASCII Master / Slave
Search	Serial direct COM and Ethernet Auto search or specific IP
Diagnostics	Display PC IP, ping, save test config. (text readable)
Firmware Upgrade	Vlinx Manager

### ETHERNET PASS-THROUGH PORT (MESR92X)

Standards	IEEE 802.3, 802.3u, 802.3x
Processing Type	Store and Forward with 802.3x full duplex, non blocking flow control
Flow Control	IEEE 802.3x flow control, back pressure flow control
MAC Address Table	2K

### CONFIGURATION SOFTWARE

Vlinx Manager	Windows 2000, XP (32/64 bit), 2003 Server (32/64 bit), Vista (32/64 bit), 2008 Server (32/64 bit), Win 7 (32/64 bit)
---------------	--

### REGULATORY

Compliance	FCC, CE, NEMA TS2 UL Listed, File E222870 UL Class 1 Division 2 Groups A, B, C, D (HAZLOC), File E245458
------------	--