




Connectware™

Quick Start Guide Digi One™ SP



1

What's in the Box

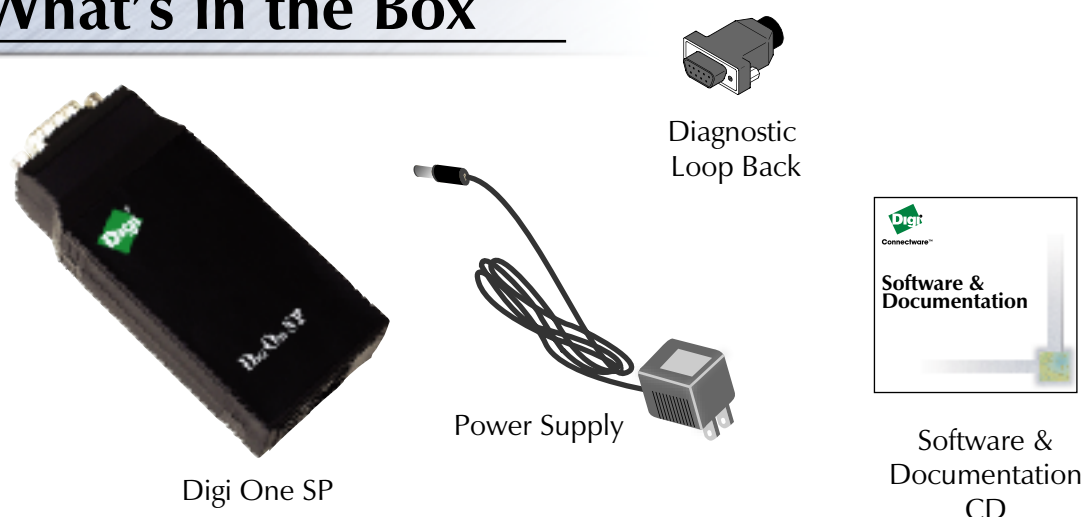

2

Install Hardware

Set serial DIP switch according to your serial device requirements (EIA-232/422/485). Use the table below for the device server pin outs.

If switch 4 is up, termination if down, no termination.

Up/On	Down/Off	1	2	3	4	1	2	3	4	1	2	3	4
DB-9 Pin		EIA-232	EIA-422/485 Full-Duplex	EIA-485 Half Duplex									
1		DCD	CTS-	Not used									
2		RxD	RxD+	RxD+									
3		TxD	TxD+	TxD+									
4		DTR	RTS-	Not used									
5		GND	GND	GND									
6		DSR	RxD-	RxD-									
7		RTS	RTS+	Not used									
8		CTS	CTS+	Not used									
9		RI	TxD-	TxD-									
Shell		GND											

Serial Cable

Ethernet

Power Supply

Once power is connected, the lights will blink while the system boots up and the red power light will blink until the IP address is assigned.

Once you connect the power supply, the unit will power up.

3

Insert CD

Insert CD to configure the unit.
If CD does not start automatically, double-click **My Computer > CD-ROM drive**.

4

Set Up Device Server

Click **setup** if wizard does not pop up automatically

Follow wizard to set up device server

5

Follow Wizard

Use the graphics to select your scenario

Follow the prompts to complete wizard

Congratulations!

You have completed the wizard and your device server is now configured.

If you want more information,

- Go to the User's Guide on the CD under Documentation or
- Open your browser and enter your IP address in the URL to log on to your device server. Default username is **root** and password is **dbps**.

From the web interface you can check your settings or make any changes specific to your environment.

© 2003 Digi International Inc. All rights reserved.
The Digi logo, the Digi Connectware logo, and Digi One are trademarks or registered trademarks of Digi International, Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.

Visit us at www.digi.com



PN:(1P)90000266C1